


KÄRCHER

makes a difference

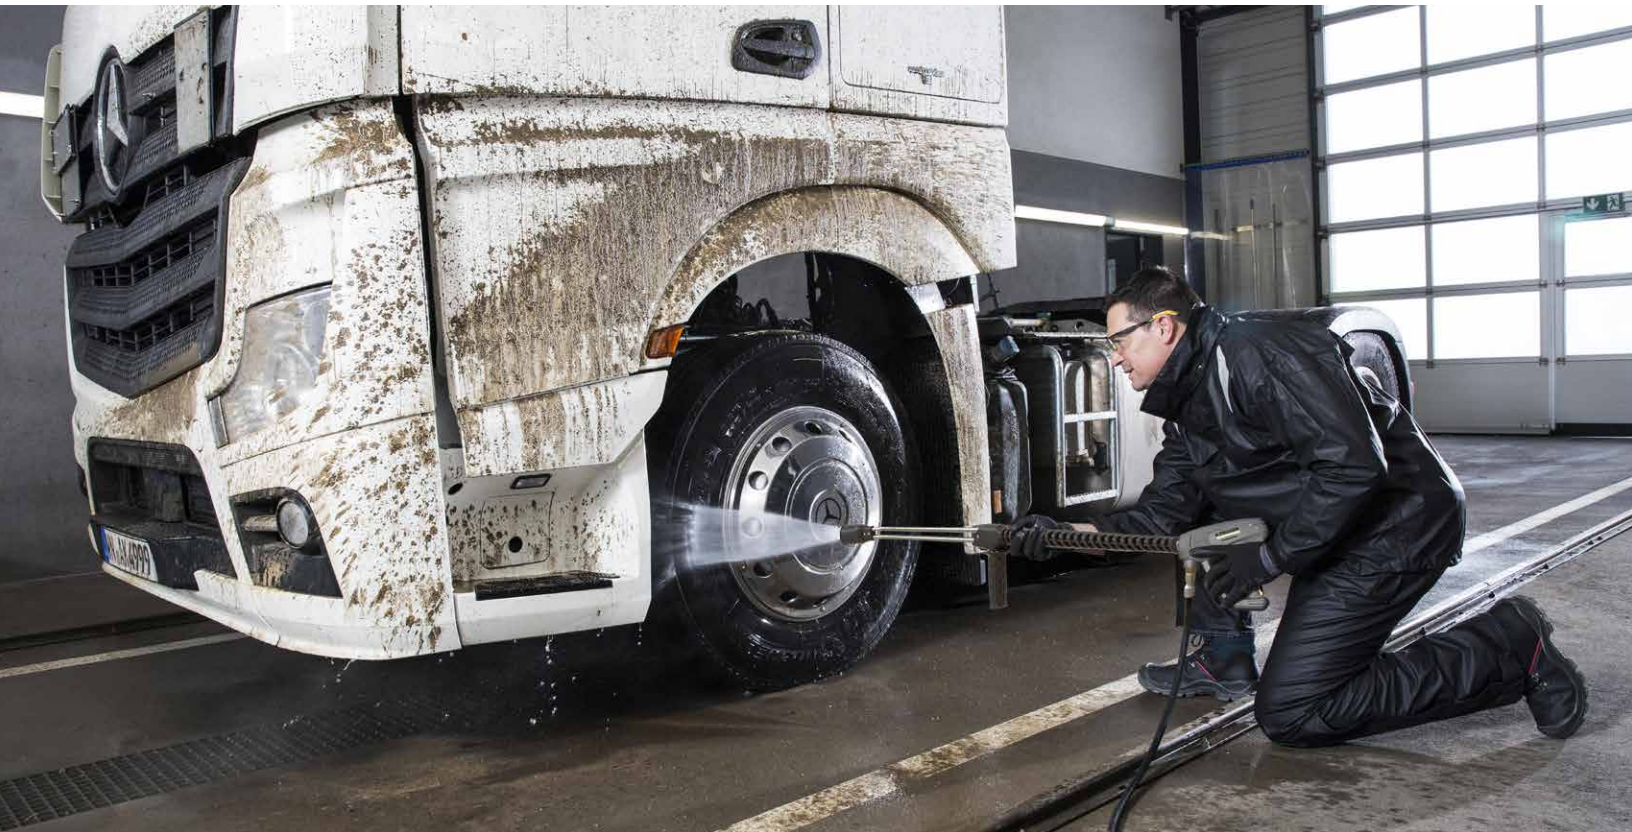

RUGGED DESIGN FOR INDUSTRIAL CLEANING.

Hot water, natural gas or LP-heated pressure washer.

PROFESSIONAL | NG OR LP CABINET

HDS STATIONARY - NG - NORTH AMERICAN



High cleaning performance.

The Liberty Kärcher HDS natural gas and LP-heated cabinet pressure washer delivers up to 9.5 gpm at 3000 psi of industrial power. Built in the U.S.A., each model is constructed with anodized structural rivets, industrial motors and Kärcher pumps that are backed by a 7-year warranty. All models are ETL certified to UL and CSA safety standards.



HDS STATIONARY - NG

Natural gas-heated 3.5-5 GPM medium cabinet design

Model	Part No.	GPM	PSI	Drive	Electrical	Amps	Pump / RPM	HP	Weight (lbs)	BTU	Dimensions (L x W x H)
HDS 3.5/20 Ea ST NG	1.109-715.0	3.5	2000	Belt	230V / 1ph	25	KD4020R / 1350	5	815	320000	49 x 24 x 48
HDS 4.0/22 Ea ST NG	1.109-716.0	4	2200	Belt	230V / 1ph	29	KM4035R / 1250	6.2	843	364000	49 x 24 x 48
HDS 4.0/22 Eb ST NG	1.109-717.0	4	2200	Belt	230V / 3ph	16	KM4035R / 1250	6.2	843	364000	49 x 24 x 48
HDS 4.0/22 Ec ST NG	1.109-718.0	4	2200	Belt	460V / 3ph	7	KM4035R / 1250	6.2	843	364000	49 x 24 x 48
HDS 4.0/22 Ef ST NG	1.109-719.0	4	2200	Belt	575V / 3ph	6.5	KM4035R / 1250	6.2	843	364000	49 x 24 x 48
HDS 4.0/22 Eg ST NG	1.109-720.0	4	2200	Belt	208V / 1ph	30	KM4035R / 1250	6.2	843	364000	49 x 24 x 48
HDS 4.0/22 Eh ST NG	1.109-721.0	4	2200	Belt	208V / 3ph	18	KM4035R / 1250	6.2	843	364000	49 x 24 x 48
HDS 3.9/30 Ea ST NG	1.109-723.0	3.9	3000	Belt	230V / 1ph	36	KM4035R / 1225	8.2	856	354000	49 x 24 x 48
HDS 3.9/30 Eb ST NG	1.109-724.0	3.9	3000	Belt	230V / 3ph	25	KM4035R / 1225	8.2	856	354000	49 x 24 x 48
HDS 3.9/30 Ec ST NG	1.109-725.0	3.9	3000	Belt	460V / 3ph	11	KM4035R / 1225	8.2	856	354000	49 x 24 x 48
HDS 3.9/30 Ef ST NG	1.109-726.0	3.9	3000	Belt	575V / 3ph	14	KM4035R / 1225	8.2	856	354000	49 x 24 x 48
HDS 3.9/30 Eg ST NG	1.109-727.0	3.9	3000	Belt	208V / 1ph	38	KM4035R / 1225	8.2	856	354000	49 x 24 x 48
HDS 3.9/30 Eh ST NG	1.109-728.0	3.9	3000	Belt	208V / 3ph	27	KM4035R / 1225	8.2	856	354000	49 x 24 x 48
HDS 5.0/23 Ea ST NG	1.109-730.0	5.0	2300	Belt	230V / 1ph	36	KT6035R / 1225	8.2	856	439000	49 x 24 x 48
HDS 5.0/23 Eb ST NG	1.109-731.0	5.0	2300	Belt	230V / 3ph	25	KT6035R / 1225	8.2	856	439000	49 x 24 x 48
HDS 5.0/23 Ec ST NG	1.109-732.0	5.0	2300	Belt	460V / 3ph	11	KT6035R / 1225	8.2	856	439000	49 x 24 x 48
HDS 5.0/23 Ef ST NG	1.109-733.0	5.0	2300	Belt	575V / 3ph	14	KT6035R / 1225	8.2	856	439000	49 x 24 x 48
HDS 5.0/23 Eg ST NG	1.109-734.0	5.0	2300	Belt	208V / 1ph	38	KT6035R / 1225	8.2	856	439000	49 x 24 x 48
HDS 5.0/23 Eh ST NG	1.109-735.0	5.0	2300	Belt	208V / 3ph	27	KT6035R / 1225	8.2	856	439000	49 x 24 x 48
HDS 4.8/30 Ea ST NG	1.109-736.0	4.8	3000	Belt	230V / 1ph	42	KT6035R / 1225	10	885	415000	49 x 24 x 48
HDS 4.8/30 Eb ST NG	1.109-737.0	4.8	3000	Belt	230V / 1ph	26	KT6035R / 1225	10	885	415000	49 x 24 x 48
HDS 4.8/30 Ec ST NG	1.109-738.0	4.8	3000	Belt	460V / 3ph	15	KT6035R / 1225	10	885	415000	49 x 24 x 48
HDS 4.8/30 Ef ST NG	1.109-739.0	4.8	3000	Belt	575V / 3ph	14	KT6035R / 1225	10	885	415000	49 x 24 x 48
HDS 4.8/30 Eg ST NG	1.109-740.0	4.8	3000	Belt	208V / 1ph	49	KT6035R / 1225	10	885	415000	49 x 24 x 48
HDS 4.8/30 Eh ST NG	1.109-741.0	4.8	3000	Belt	208V / 3ph	32	KT6035R / 1225	10	885	415000	49 x 24 x 48

Natural gas-heated 6.3+ GPM large cabinet design

Model	Part No.	GPM	PSI	Drive	Electrical	Amps	Pump / RPM	HP	Weight (lbs)	BTU	Dimensions (L x W x H)
HDS 6.3/32 Eb ST NG	1.109-744.0	6.3	3200	Belt	230V / 3ph	39	KT6035R / 1625	15	1825	507000	64 x 35 x 61
HDS 6.3/32 Ec ST NG	1.109-745.0	6.3	3200	Belt	460V / 3ph	19	KT6035R / 1625	15	1825	507000	64 x 35 x 61
HDS 6.3/32 Ef ST NG	1.109-746.0	6.3	3200	Belt	575V / 3ph	18	KT6035R / 1625	15	1825	507000	64 x 35 x 61
HDS 6.3/32 Eh ST NG	1.109-747.0	6.3	3200	Belt	208V / 3ph	39	KT6035R / 1625	15	1825	507000	64 x 35 x 61
HDS 8.0/32 Eb ST NG	1.109-748.0	8.0	3200	Belt	230V / 3ph	46	KX9536R / 1458	20	1840	658000	64 x 35 x 61
HDS 8.0/32 Ec ST NG	1.109-749.0	8.0	3200	Belt	460V / 3ph	26	KX9536R / 1458	20	1840	658000	64 x 35 x 61
HDS 8.0/32 Ef ST NG	1.109-750.0	8.0	3200	Belt	575V / 3ph	21	KX9536R / 1458	20	1840	658000	64 x 35 x 61
HDS 8.0/32 Eh ST NG	1.109-751.0	8.0	3200	Belt	208V / 3ph	60	KX9536R / 1458	20	1840	658000	64 x 35 x 61
HDS 9.5/30 Eb ST NG	1.109-752.0	9.5	3000	Belt	230V / 3ph	52	KX1036R / 1650	20	1910	816000	64 x 35 x 61
HDS 9.5/30 Ec ST NG	1.109-753.0	9.5	3000	Belt	460V / 3ph	26	KX1036R / 1650	20	1910	816000	64 x 35 x 61
HDS 9.5/30 Ef ST NG	1.109-754.0	9.5	3000	Belt	575V / 3ph	21	KX1036R / 1650	20	1910	816000	64 x 35 x 61
HDS 9.5/30 Eh ST NG	1.109-755.0	9.5	3000	Belt	208V / 3ph	30	KX1036R / 1650	20	1910	816000	64 x 35 x 61

HDS STATIONARY - LP

LP gas-heated 3.5-5 GPM medium cabinet design

Model	Part No.	GPM	PSI	Drive	Electrical	Amps	Pump / RPM	HP	Weight (lbs)	BTU	Dimensions (L x W x H)
HDS 3.5/20 Ea ST LP	1.109-756.0	3.5	2000	Belt	230V / 1ph	25	KD4020R / 1350h	5	815	320000	49 x 24 x 48
HDS 4.0/22 Ea ST LP	1.109-757.0	4	2200	Belt	230V / 1ph	29	KM4035R / 1250	6.2	843	364000	49 x 24 x 48
HDS 4.0/22 Eb ST LP	1.109-758.0	4	2200	Belt	230V / 3ph	16	KM4035R / 1250	6.2	843	364000	49 x 24 x 48
HDS 4.0/22 Ec ST LP	1.109-759.0	4	2200	Belt	460V / 3ph	7	KM4035R / 1250	6.2	843	364000	49 x 24 x 48
HDS 4.0/22 Ef ST LP	1.109-760.0	4	2200	Belt	575V / 3ph	6.5	KM4035R / 1250	6.2	843	364000	49 x 24 x 48
HDS 4.0/22 Eg ST LP	1.109-761.0	4	2200	Belt	208V / 1ph	30	KM4035R / 1250	6.2	843	364000	49 x 24 x 48
HDS 4.0/22 Eh ST LP	1.109-762.0	4	2200	Belt	208V / 3ph	18	KM4035R / 1250	6.2	843	364000	49 x 24 x 48
HDS 3.9/30 Ea ST LP	1.109-764.0	3.9	3000	Belt	230V / 1ph	36	KM4035R / 1225	8.2	856	354000	49 x 24 x 48
HDS 3.9/30 Eb ST LP	1.109-765.0	3.9	3000	Belt	230V / 3ph	25	KM4035R / 1225	8.2	856	354000	49 x 24 x 48
HDS 3.9/30 Ec ST LP	1.109-766.0	3.9	3000	Belt	460V / 3ph	11	KM4035R / 1225	8.2	856	354000	49 x 24 x 48
HDS 3.9/30 Ef ST LP	1.109-767.0	3.9	3000	Belt	575V / 3ph	14	KM4035R / 1225	8.2	856	354000	49 x 24 x 48
HDS 3.9/30 Eg ST LP	1.109-768.0	3.9	3000	Belt	208V / 1ph	38	KM4035R / 1225	8.2	856	354000	49 x 24 x 48
HDS 3.9/30 Eh ST LP	1.109-769.0	3.9	3000	Belt	208V / 3ph	27	KM4035R / 1225	8.2	856	354000	49 x 24 x 48
HDS 5.0/23 Ea ST LP	1.109-771.0	5.0	2300	Belt	230V / 1ph	36	KT6035R / 1225	8.2	856	439000	49 x 24 x 48
HDS 5.0/23 Eb ST LP	1.109-772.0	5.0	2300	Belt	230V / 3ph	25	KT6035R / 1225	8.2	856	439000	49 x 24 x 48
HDS 5.0/23 Ec ST LP	1.109-773.0	5.0	2300	Belt	460V / 3ph	11	KT6035R / 1225	8.2	856	439000	49 x 24 x 48
HDS 5.0/23 Ef ST LP	1.109-774.0	5.0	2300	Belt	575V / 3ph	14	KT6035R / 1225	8.2	856	439000	49 x 24 x 48
HDS 5.0/23 Eg ST LP	1.109-775.0	5.0	2300	Belt	208V / 1ph	38	KT6035R / 1225	8.2	856	439000	49 x 24 x 48
HDS 5.0/23 Eh ST LP	1.109-776.0	5.0	2300	Belt	208V / 3ph	27	KT6035R / 1225	8.2	856	439000	49 x 24 x 48
HDS 4.8/30 Ea ST LP	1.109-777.0	4.8	3000	Belt	230V / 1ph	42	KT6035R / 1225	10	885	415000	49 x 24 x 48
HDS 4.8/30 Eb ST LP	1.109-778.0	4.8	3000	Belt	230V / 3ph	26	KT6035R / 1225	10	885	415000	49 x 24 x 48
HDS 4.8/30 Ec ST LP	1.109-779.0	4.8	3000	Belt	460V / 3ph	15	KT6035R / 1225	10	885	415000	49 x 24 x 48
HDS 4.8/30 Ef ST LP	1.109-780.0	4.8	3000	Belt	575V / 3ph	14	KT6035R / 1225	10	885	415000	49 x 24 x 48
HDS 4.8/30 Eg ST LP	1.109-781.0	4.8	3000	Belt	208V / 1ph	49	KT6035R / 1225	10	885	415000	49 x 24 x 48
HDS 4.8/30 Eh ST LP	1.109-782.0	4.8	3000	Belt	208V / 3ph	32	KT6035R / 1225	10	885	415000	49 x 24 x 48

LP gas-heated 6.3+ GPM large cabinet design

Model	Part No.	GPM	PSI	Drive	Electrical	Amps	Pump / RPM	HP	Weight (lbs)	BTU	Dimensions (L x W x H)
HDS 6.3/32 Eb ST LP	1.109-785.0	6.3	3200	Belt	230V / 3ph	39	KT6035R / 1625	15	1825	507000	64 x 35 x 61
HDS 6.3/32 Ec ST LP	1.109-786.0	6.3	3200	Belt	460V / 3ph	19	KT6035R / 1625	15	1825	507000	64 x 35 x 61
HDS 6.3/32 Ef ST LP	1.109-787.0	6.3	3200	Belt	575V / 3ph	18	KT6035R / 1625	15	1825	507000	64 x 35 x 61
HDS 6.3/32 Eh ST LP	1.109-788.0	6.3	3200	Belt	208V / 3ph	39	KT6035R / 1625	15	1825	507000	64 x 35 x 61
HDS 8.0/32 Eb ST LP	1.109-789.0	8.0	3200	Belt	230V / 3ph	46	KX9536R / 1458	20	1840	658000	64 x 35 x 61
HDS 8.0/32 Ec ST LP	1.109-790.0	8.0	3200	Belt	460V / 3ph	26	KX9536R / 1458	20	1840	658000	64 x 35 x 61
HDS 8.0/32 Ef ST LP	1.109-791.0	8.0	3200	Belt	575V / 3ph	21	KX9536R / 1458	20	1840	658000	64 x 35 x 61
HDS 8.0/32 Eh ST LP	1.109-792.0	8.0	3200	Belt	208V / 3ph	60	KX9536R / 1458	20	1840	658000	64 x 35 x 61
HDS 9.5/30 Eb ST LP	1.109-793.0	9.5	3000	Belt	230V / 3ph	52	KX1036R / 1650	20	1910	775000	64 x 35 x 61
HDS 9.5/30 Ec ST LP	1.109-794.0	9.5	3000	Belt	460V / 3ph	26	KX1036R / 1650	20	1910	775000	64 x 35 x 61
HDS 9.5/30 Ef ST LP	1.109-795.0	9.5	3000	Belt	575V / 3ph	21	KX1036R / 1650	20	1910	775000	64 x 35 x 61
HDS 9.5/30 Eh ST LP	1.109-796.0	9.5	3000	Belt	208V / 3ph	60	KX1036R / 1650	20	1910	775000	64 x 35 x 61

Standard EASY!Force Accessory

Order No.	Description
8.756-481.0	EASY!Force trigger gun (North American Model) - zero force required. Standard 1/4" connection for wand, 3/8" connection for hose.

Accessories - Simple to configure with "Easy-Add" option kits

Order No.	Product
8.917-508.0	Kit, time delay shutdown
8.917-509.0	Kit, wireless remote pump/burner/detergent
8.921-832.0	Wireless hand-held transmitter
8.917-817.0	Kit, wall bracket wireless transmitter
8.921-774.0	NG kit, wired remote station - pump and burner
8.921-773.0	NG kit, wired remote detergent
8.922-157.0	Remote control box (wired) (Pump / burner switch included, add 8.921-773.0 for detergent switch)
8.917-507.0	Kit, auto start/stop - wireless remote, no remote
8.923-213.0	Outlet relocater
9.807-646.0	Kit, auto start/stop - wired remote, no lockout
8.921-776.0	Kit, steam combo
9.801-040.0	Draft diverter, 10", up to 5 gpm
8.717-730.0	Draft diverter, 12", over 5 gpm
8.753-474.0	Draft damper, 10"
8.753-478.0	Draft damper, 12"
8.753-706.0	Reducer, stack 12" to 10"
8.753-707.0	Reducer, stack 10" to 8"

Please contact us for more information:

North America

4555 Airport Way
Denver, CO 80239
U.S.A.

Phone 888-805-9852
Fax 800-248-8409

www.karcher.com/us

Canada

6535 Millcreek Drive
Unit 67
Mississauga, ON L5N 2M2
Canada

Phone 905-672-8233
Fax 905-672-3155

www.karcher.ca